


GEEFUN®

DR-3D

DR标准钻头3D

DR-Solid Carbide Standard Drill Set Shank DIN-6537K

适用于普通加工, 模具, 汽配和航空等各种材料。
Applicable to ordinary processing , mold, automobile and aviation and other materials.



红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029


DR-3D | 标准钻头
Carbide Twist Drill



ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR3D-001	1	4	2.5	Φ4	28	50
DR3D-011	1.1	4	2.5	Φ4	28	50
DR3D-012	1.2	5	3	Φ4	28	50
DR3D-0125	1.25	5	3	Φ4	28	50
DR3D-013	1.3	5	3	Φ4	28	50
DR3D-0135	1.35	6	4	Φ4	28	50
DR3D-014	1.4	6	4	Φ4	28	50
DR3D-0145	1.45	6	4	Φ4	28	50
DR3D-015	1.5	6	4	Φ4	28	50
DR3D-016	1.6	6	4	Φ4	28	50
DR3D-017	1.7	7	5	Φ4	28	50
DR3D-0175	1.75	7	5	Φ4	28	50
DR3D-018	1.8	7	5	Φ4	28	50
DR3D-019	1.9	8	6	Φ4	28	50
DR3D-0195	1.95	8	6	Φ4	28	50
DR3D-002	2.0	8	6	Φ4	28	50
DR3D-0205	2.05	9	7	Φ4	28	50
DR3D-021	2.1	9	7	Φ4	28	50
DR3D-0215	2.15	9	7	Φ4	28	50
DR3D-022	2.2	9	7	Φ4	28	50
DR3D-023	2.3	9	7	Φ4	28	50
DR3D-0235	2.35	10	8	Φ4	28	50
DR3D-024	2.4	10	8	Φ4	28	50
DR3D-025	2.5	10	8	Φ4	28	50
DR3D-0255	2.55	11	9	Φ4	28	50
DR3D-026	2.6	11	9	Φ4	28	50
DR3D-0265	2.65	11	9	Φ4	28	50
DR3D-027	2.7	11	9	Φ4	28	50
DR3D-028	2.8	11	9	Φ4	28	50

DR-3D
DR标准钻头3D
DR-Solid Carbide Standard Drill Set Shank DIN-6537K

DR-3D | 标准钻头
Carbide Twist Drill




红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR3D-0285	2.85	12	10	Φ4	28	50
DR3D-029	2.9	12	10	Φ4	28	50
DR3D-0295	2.95	17	15	Φ4	28	50
DR3D-003	3	20	14	Φ4	36	62
DR3D-031	3.1	20	14	Φ4	36	62
DR3D-0315	3.15	20	14	Φ4	36	62
DR3D-032	3.2	20	14	Φ4	36	62
DR3D-0325	3.25	20	14	Φ4	36	62
DR3D-033	3.3	20	14	Φ4	36	62
DR3D-034	3.4	20	14	Φ4	36	62
DR3D-035	3.5	20	14	Φ4	36	62
DR3D-036	3.6	20	14	Φ4	36	62
DR3D-037	3.7	20	14	Φ4	36	62
DR3D-038	3.8	24	17	Φ4	36	62
DR3D-0385	3.85	24	17	Φ4	36	62
DR3D-039	3.9	24	17	Φ4	36	62
DR3D-004	4	24	17	Φ4	36	62
DR3D-041	4.1	24	17	Φ6	36	66
DR3D-042	4.2	24	17	Φ6	36	66
DR3D-043	4.3	24	17	Φ6	36	66
DR3D-0435	4.35	24	17	Φ6	36	66
DR3D-044	4.4	24	17	Φ6	36	66
DR3D-0445	4.45	24	17	Φ6	36	66
DR3D-045	4.5	24	17	Φ6	36	66
DR3D-046	4.6	24	17	Φ6	36	66
DR3D-0465	4.65	24	17	Φ6	36	66
DR3D-047	4.7	24	17	Φ6	36	66
DR3D-048	4.8	28	20	Φ6	36	66
DR3D-049	4.9	28	20	Φ6	36	66
DR3D-005	5	28	20	Φ6	36	66
DR3D-051	5.1	28	20	Φ6	36	66
DR3D-052	5.2	28	20	Φ6	36	66


标准钻头

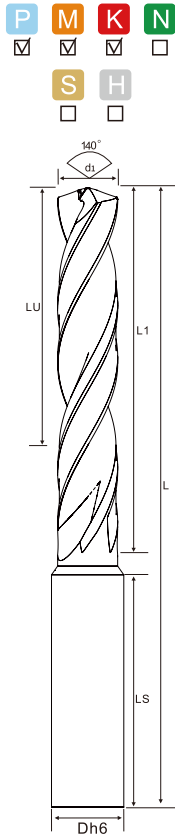

红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3 < ϕ ≤ 6	+0.004~+0.016
6 < ϕ ≤ 10	+0.006~+0.021
10 < ϕ ≤ 18	+0.007~+0.025
18 < ϕ ≤ 20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR3D-0525	5.25	28	20	Φ6	36	66
DR3D-053	5.3	28	20	Φ6	36	66
DR3D-054	5.4	28	20	Φ6	36	66
DR3D-055	5.5	28	20	Φ6	36	66
DR3D-0555	5.55	28	20	Φ6	36	66
DR3D-056	5.6	28	20	Φ6	36	66
DR3D-057	5.7	28	20	Φ6	36	66
DR3D-0575	5.75	28	20	Φ6	36	66
DR3D-058	5.8	28	20	Φ6	36	66
DR3D-059	5.9	28	20	Φ6	36	66
DR3D-0595	5.95	28	20	Φ6	36	66
DR3D-006	6	28	20	Φ6	36	66
DR3D-061	6.1	34	24	Φ8	36	79
DR3D-062	6.2	34	24	Φ8	36	79
DR3D-063	6.3	34	24	Φ8	36	79
DR3D-064	6.4	34	24	Φ8	36	79
DR3D-065	6.5	34	24	Φ8	36	79
DR3D-066	6.6	34	24	Φ8	36	79
DR3D-067	6.7	34	24	Φ8	36	79
DR3D-0675	6.75	34	24	Φ8	36	79
DR3D-068	6.8	34	24	Φ8	36	79
DR3D-069	6.9	34	24	Φ8	36	79
DR3D-007	7	34	24	Φ8	36	79
DR3D-071	7.1	41	29	Φ8	36	79
DR3D-072	7.2	41	29	Φ8	36	79
DR3D-073	7.3	41	29	Φ8	36	79
DR3D-074	7.4	41	29	Φ8	36	79
DR3D-0745	7.45	41	29	Φ8	36	79
DR3D-075	7.5	41	29	Φ8	36	79
DR3D-076	7.6	41	29	Φ8	36	79
DR3D-077	7.7	41	29	Φ8	36	79
DR3D-078	7.8	41	29	Φ8	36	79

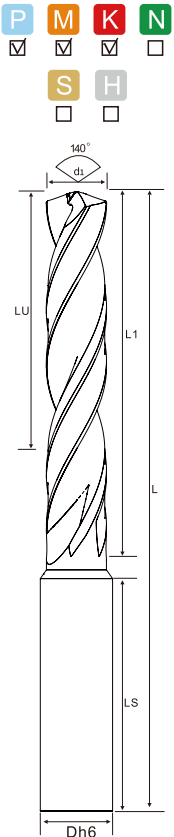


红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3 < ϕ ≤ 6	+0.004~+0.016
6 < ϕ ≤ 10	+0.006~+0.021
10 < ϕ ≤ 18	+0.007~+0.025
18 < ϕ ≤ 20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR3D-079	7.9	41	29	Φ8	36	79
DR3D-008	8	41	29	Φ8	36	79
DR3D-081	8.1	47	35	Φ10	40	89
DR3D-082	8.2	47	35	Φ10	40	89
DR3D-083	8.3	47	35	Φ10	40	89
DR3D-084	8.4	47	35	Φ10	40	89
DR3D-085	8.5	47	35	Φ10	40	89
DR3D-086	8.6	47	35	Φ10	40	89
DR3D-087	8.7	47	35	Φ10	40	89
DR3D-0875	8.75	47	35	Φ10	40	89
DR3D-088	8.8	47	35	Φ10	40	89
DR3D-089	8.9	47	35	Φ10	40	89
DR3D-009	9	47	35	Φ10	40	89
DR3D-091	9.1	47	35	Φ10	40	89
DR3D-092	9.2	47	35	Φ10	40	89
DR3D-093	9.3	47	35	Φ10	40	89
DR3D-0935	9.35	47	35	Φ10	40	89
DR3D-094	9.4	47	35	Φ10	40	89
DR3D-0945	9.45	47	35	Φ10	40	89
DR3D-095	9.5	47	35	Φ10	40	89
DR3D-096	9.6	47	35	Φ10	40	89
DR3D-097	9.7	47	35	Φ10	40	89
DR3D-098	9.8	47	35	Φ10	40	89
DR3D-099	9.9	47	35	Φ10	40	89
DR3D-100	10	47	35	Φ10	40	89
DR3D-101	10.1	55	40	Φ12	45	102
DR3D-102	10.2	55	40	Φ12	45	102
DR3D-1025	10.25	55	40	Φ12	45	102
DR3D-103	10.3	55	40	Φ12	45	102
DR3D-104	10.4	55	40	Φ12	45	102
DR3D-105	10.5	55	40	Φ12	45	102
DR3D-106	10.6	55	40	Φ12	45	102

标准钻头

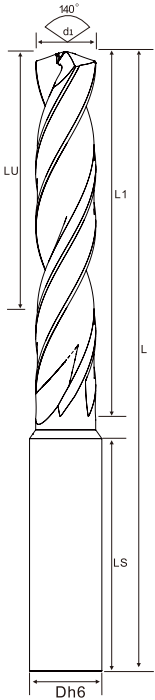

■ 红色字体标注的有螺纹底孔
Threaded bottom hole marked in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR3D-107	10.7	55	40	Φ12	45	102
DR3D-1075	10.75	55	40	Φ12	45	102
DR3D-108	10.8	55	40	Φ12	45	102
DR3D-109	10.9	55	40	Φ12	45	102
DR3D-110	11	55	40	Φ12	45	102
DR3D-111	11.1	55	40	Φ12	45	102
DR3D-112	11.2	55	40	Φ12	45	102
DR3D-1125	11.25	55	40	Φ12	45	102
DR3D-113	11.3	55	40	Φ12	45	102
DR3D-1135	11.35	55	40	Φ12	45	102
DR3D-114	11.4	55	40	Φ12	45	102
DR3D-1145	11.45	55	40	Φ12	45	102
DR3D-115	11.5	55	40	Φ12	45	102
DR3D-116	11.6	55	40	Φ12	45	102
DR3D-117	11.7	55	40	Φ12	45	102
DR3D-118	11.8	55	40	Φ12	45	102
DR3D-119	11.9	55	40	Φ12	45	102
DR3D-120	12	55	40	Φ12	45	102
DR3D-121	12.1	60	43	Φ14	45	107
DR3D-122	12.2	60	43	Φ14	45	107
DR3D-1225	12.25	60	43	Φ14	45	107
DR3D-123	12.3	60	43	Φ14	45	107
DR3D-124	12.4	60	43	Φ14	45	107
DR3D-125	12.5	60	43	Φ14	45	107
DR3D-126	12.6	60	43	Φ14	45	107
DR3D-127	12.7	60	43	Φ14	45	107
DR3D-1275	12.75	60	43	Φ14	45	107
DR3D-128	12.8	60	43	Φ14	45	107
DR3D-129	12.9	60	43	Φ14	45	107
DR3D-130	13	60	43	Φ14	45	107
DR3D-131	13.1	60	43	Φ14	45	107
DR3D-1335	13.35	60	43	Φ14	45	107



■ 红色字体标注的有螺纹底孔
Threaded bottom hole marked in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR3D-135	13.5	60	43	Φ14	45	107
DR3D-1365	13.65	60	43	Φ14	45	107
DR3D-138	13.8	60	43	Φ14	45	107
DR3D-140	14	60	43	Φ14	45	107
DR3D-1425	14.25	65	45	Φ16	48	115
DR3D-143	14.3	65	45	Φ16	48	115
DR3D-145	14.5	65	45	Φ16	48	115
DR3D-1475	14.75	65	45	Φ16	48	115
DR3D-148	14.8	65	45	Φ16	48	115
DR3D-150	15	65	45	Φ16	48	115
DR3D-151	15.1	65	45	Φ16	48	115
DR3D-1525	15.25	65	45	Φ16	48	115
DR3D-1535	15.35	65	45	Φ16	48	115
DR3D-155	15.5	65	45	Φ16	48	115
DR3D-158	15.8	65	45	Φ16	48	115
DR3D-160	16	65	45	Φ16	48	115
DR3D-165	16.5	73	51	Φ18	48	123
DR3D-1675	16.75	73	51	Φ18	48	123
DR3D-168	16.8	73	51	Φ18	48	123
DR3D-170	17	73	51	Φ18	48	123
DR3D-175	17.5	73	51	Φ18	48	123
DR3D-178	17.8	73	51	Φ18	48	123
DR3D-179	17.9	73	51	Φ18	48	123
DR3D-180	18	73	51	Φ18	48	123
DR3D-183	18.3	79	55	Φ20	50	131
DR3D-185	18.5	79	55	Φ20	50	131
DR3D-188	18.8	79	55	Φ20	50	131
DR3D-190	19	79	55	Φ20	50	131
DR3D-195	19.5	79	55	Φ20	50	131
DR3D-198	19.8	79	55	Φ20	50	131
DR3D-200	20	79	55	Φ20	50	131
DR3D-204	20.4	86	60	Φ22	50	141

DR-3D
DR标准钻头3D
DR-Solid Carbide Standard Drill Set Shank DIN-6537K

DR-3D
标准钻头
Carbide Twist Drill

GEEFUN
DR-5D
标准钻头
Carbide Twist Drill

DR-5D
DR标准钻头5D
DR-Solid Carbide Standard Drill Set Shank DIN-6537L
适用于普通加工, 模具, 汽配和航空等各种材料。
Applicable to ordinary processing, mold, automobile and aviation and other materials.




红色字体标注的有螺纹底孔
Threaded bottom hole marked in red font

Table with 2 columns: d (刃径), T (m7公差). Rows show diameter ranges and corresponding tolerance values.

APPLICABLE TABLE OF MACHINABLE MATERIALS
可切削材料适用表

Table mapping material types to suitability. Columns include Carbon Steel, Alloy Steel, Pre-hardened Steel, Hardened Steel, Stainless Steel, Cast Iron, Copper Alloy, Aluminum Alloy, Titanium Alloy, and Heat-resisting Alloy. Suitability is indicated by red or black circles.




红色字体标注的有螺纹底孔
Threaded bottom hole marked in red font

Table with 2 columns: d (刃径), T (m7公差). Rows show diameter ranges and corresponding tolerance values.

Main table listing DR-5D drill bit specifications. Columns: ITEM CODE, d1-m7, L1, LU, Dh6, LS, L. Rows include codes like DR5D-001, DR5D-011, etc., with corresponding dimensions.

标准钻头




红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR5D-0285	2.85	17	15	Φ4	28	50
DR5D-029	2.9	17	15	Φ4	28	50
DR5D-0295	2.95	22	20	Φ4	28	50
DR5D-003	3	28	23	Φ4	36	66
DR5D-031	3.1	28	23	Φ4	36	66
DR5D-0315	3.15	28	23	Φ4	36	66
DR5D-032	3.2	28	23	Φ4	36	66
DR5D-0325	3.25	28	23	Φ4	36	66
DR5D-033	3.3	28	23	Φ4	36	66
DR5D-034	3.4	28	23	Φ4	36	66
DR5D-035	3.5	28	23	Φ4	36	66
DR5D-036	3.6	28	23	Φ4	36	66
DR5D-037	3.7	28	23	Φ4	36	66
DR5D-038	3.8	36	29	Φ4	36	66
DR5D-0385	3.85	36	29	Φ4	36	66
DR5D-039	3.9	36	29	Φ4	36	66
DR5D-004	4	36	29	Φ4	36	66
DR5D-041	4.1	36	29	Φ6	36	74
DR5D-042	4.2	36	29	Φ6	36	74
DR5D-043	4.3	36	29	Φ6	36	74
DR5D-0435	4.35	36	29	Φ6	36	74
DR5D-044	4.4	36	29	Φ6	36	74
DR5D-0445	4.45	36	29	Φ6	36	74
DR5D-045	4.5	36	29	Φ6	36	74
DR5D-046	4.6	36	29	Φ6	36	74
DR5D-0465	4.65	36	29	Φ6	36	74
DR5D-047	4.7	36	29	Φ6	36	74
DR5D-048	4.8	44	35	Φ6	36	82
DR5D-049	4.9	44	35	Φ6	36	82
DR5D-005	5	44	35	Φ6	36	82
DR5D-051	5.1	44	35	Φ6	36	82
DR5D-052	5.2	44	35	Φ6	36	82
DR5D-0525	5.25	44	35	Φ6	36	82

标准钻头




红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR5D-053	5.3	44	35	Φ6	36	82
DR5D-054	5.4	44	35	Φ6	36	82
DR5D-055	5.5	44	35	Φ6	36	82
DR5D-0555	5.55	44	35	Φ6	36	82
DR5D-056	5.6	44	35	Φ6	36	82
DR5D-057	5.7	44	35	Φ6	36	82
DR5D-0575	5.75	44	35	Φ6	36	82
DR5D-058	5.8	44	35	Φ6	36	82
DR5D-059	5.9	44	35	Φ6	36	82
DR5D-0595	5.95	44	35	Φ6	36	82
DR5D-006	6	44	35	Φ6	36	82
DR5D-061	6.1	53	43	Φ8	36	91
DR5D-062	6.2	53	43	Φ8	36	91
DR5D-063	6.3	53	43	Φ8	36	91
DR5D-064	6.4	53	43	Φ8	36	91
DR5D-065	6.5	53	43	Φ8	36	91
DR5D-066	6.6	53	43	Φ8	36	91
DR5D-067	6.7	53	43	Φ8	36	91
DR5D-0675	6.75	53	43	Φ8	36	91
DR5D-068	6.8	53	43	Φ8	36	91
DR5D-069	6.9	53	43	Φ8	36	91
DR5D-007	7	53	43	Φ8	36	91
DR5D-071	7.1	53	43	Φ8	36	91
DR5D-072	7.2	53	43	Φ8	36	91
DR5D-073	7.3	53	43	Φ8	36	91
DR5D-074	7.4	53	43	Φ8	36	91
DR5D-0745	7.45	53	43	Φ8	36	91
DR5D-075	7.5	53	43	Φ8	36	91
DR5D-076	7.6	53	43	Φ8	36	91
DR5D-077	7.7	53	43	Φ8	36	91
DR5D-078	7.8	53	43	Φ8	36	91
DR5D-079	7.9	53	43	Φ8	36	91
DR5D-008	8	53	43	Φ8	36	91


标准钻头

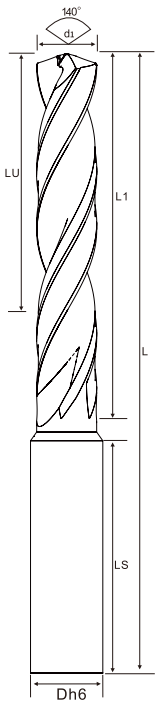

红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR5D-081	8.1	61	49	Φ10	40	103
DR5D-082	8.2	61	49	Φ10	40	103
DR5D-083	8.3	61	49	Φ10	40	103
DR5D-084	8.4	61	49	Φ10	40	103
DR5D-085	8.5	61	49	Φ10	40	103
DR5D-086	8.6	61	49	Φ10	40	103
DR5D-087	8.7	61	49	Φ10	40	103
DR5D-0875	8.75	61	49	Φ10	40	103
DR5D-088	8.8	61	49	Φ10	40	103
DR5D-089	8.9	61	49	Φ10	40	103
DR5D-009	9	61	49	Φ10	40	103
DR5D-091	9.1	61	49	Φ10	40	103
DR5D-092	9.2	61	49	Φ10	40	103
DR5D-093	9.3	61	49	Φ10	40	103
DR5D-0935	9.35	61	49	Φ10	40	103
DR5D-094	9.4	61	49	Φ10	40	103
DR5D-0945	9.45	61	49	Φ10	40	103
DR5D-095	9.5	61	49	Φ10	40	103
DR5D-096	9.6	61	49	Φ10	40	103
DR5D-097	9.7	61	49	Φ10	40	103
DR5D-098	9.8	61	49	Φ10	40	103
DR5D-099	9.9	61	49	Φ10	40	103
DR5D-100	10	61	49	Φ10	40	103
DR5D-101	10.1	71	56	Φ12	45	118
DR5D-102	10.2	71	56	Φ12	45	118
DR5D-1025	10.25	71	56	Φ12	45	118
DR5D-103	10.3	71	56	Φ12	45	118
DR5D-104	10.4	71	56	Φ12	45	118
DR5D-105	10.5	71	56	Φ12	45	118
DR5D-106	10.6	71	56	Φ12	45	118
DR5D-107	10.7	71	56	Φ12	45	118
DR5D-1075	10.75	71	56	Φ12	45	118
DR5D-108	10.8	71	56	Φ12	45	118

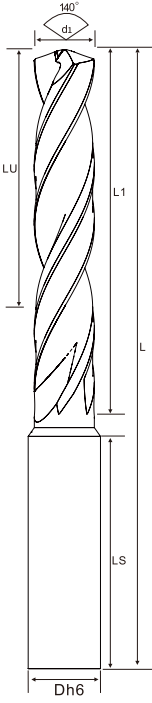

红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR5D-109	10.9	71	56	Φ12	45	118
DR5D-110	11	71	56	Φ12	45	118
DR5D-111	11.1	71	56	Φ12	45	118
DR5D-112	11.2	71	56	Φ12	45	118
DR5D-1125	11.25	71	56	Φ12	45	118
DR5D-113	11.3	71	56	Φ12	45	118
DR5D-1135	11.35	71	56	Φ12	45	118
DR5D-114	11.4	71	56	Φ12	45	118
DR5D-1145	11.45	71	56	Φ12	45	118
DR5D-115	11.5	71	56	Φ12	45	118
DR5D-116	11.6	71	56	Φ12	45	118
DR5D-117	11.7	71	56	Φ12	45	118
DR5D-118	11.8	71	56	Φ12	45	118
DR5D-119	11.9	71	56	Φ12	45	118
DR5D-120	12	71	56	Φ12	45	118
DR5D-121	12.1	77	60	Φ14	45	124
DR5D-122	12.2	77	60	Φ14	45	124
DR5D-1225	12.25	77	60	Φ14	45	124
DR5D-123	12.3	77	60	Φ14	45	124
DR5D-124	12.4	77	60	Φ14	45	124
DR5D-125	12.5	77	60	Φ14	45	124
DR5D-126	12.6	77	60	Φ14	45	124
DR5D-127	12.7	77	60	Φ14	45	124
DR5D-1275	12.75	77	60	Φ14	45	124
DR5D-128	12.8	77	60	Φ14	45	124
DR5D-129	12.9	77	60	Φ14	45	124
DR5D-130	13	77	60	Φ14	45	124
DR5D-131	13.1	77	60	Φ14	45	124
DR5D-1335	13.35	77	60	Φ14	45	124
DR5D-135	13.5	77	60	Φ14	45	124
DR5D-1365	13.65	77	60	Φ14	45	124
DR5D-138	13.8	77	60	Φ14	45	124
DR5D-140	14	77	60	Φ14	45	124

标准钻头

DR-Solid Carbide Standard Drill Set Shank DIN-6537L

标准钻头
Carbide Twist Drill


ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR5D-1425	14.25	83	63	Φ16	48	133
DR5D-143	14.3	83	63	Φ16	48	133
DR5D-145	14.5	83	63	Φ16	48	133
DR5D-1475	14.75	83	63	Φ16	48	133
DR5D-148	14.8	83	63	Φ16	48	133
DR5D-150	15	83	63	Φ16	48	133
DR5D-151	15.1	83	63	Φ16	48	133
DR5D-1525	15.25	83	63	Φ16	48	133
DR5D-1535	15.35	83	63	Φ16	48	133
DR5D-155	15.5	83	63	Φ16	48	133
DR5D-158	15.8	83	63	Φ16	48	133
DR5D-160	16	83	63	Φ16	48	133
DR5D-165	16.5	93	71	Φ18	48	143
DR5D-1675	16.75	93	71	Φ18	48	143
DR5D-168	16.8	93	71	Φ18	48	143
DR5D-170	17	93	71	Φ18	48	143
DR5D-175	17.5	93	71	Φ18	48	143
DR5D-178	17.8	93	71	Φ18	48	143
DR5D-179	17.9	93	71	Φ18	48	143
DR5D-180	18	93	71	Φ18	48	143
DR5D-183	18.3	101	77	Φ20	50	153
DR5D-185	18.5	101	77	Φ20	50	153
DR5D-188	18.8	101	77	Φ20	50	153
DR5D-190	19	101	77	Φ20	50	153
DR5D-195	19.5	101	77	Φ20	50	153
DR5D-198	19.8	101	77	Φ20	50	153
DR5D-200	20	101	77	Φ20	50	153
DR5D-204	20.4	112	85	Φ22	50	167
DR5D-205	20.5	112	85	Φ22	50	167
DR5D-210	21	112	85	Φ22	50	167
DR5D-214	21.4	112	85	Φ22	50	167
DR5D-215	21.5	112	85	Φ22	50	167
DR5D-220	22	112	85	Φ22	50	167



标准钻头
Carbide Twist Drill

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR5D-2225	22.25	126	98	Φ25	56	184
DR5D-225	22.5	126	98	Φ25	56	184
DR5D-230	23	126	98	Φ25	56	184
DR5D-2325	23.25	126	98	Φ25	56	184
DR5D-235	23.5	126	98	Φ25	56	184
DR5D-240	24	126	98	Φ25	56	184
DR5D-245	24.5	126	98	Φ25	56	184
DR5D-250	25	126	98	Φ25	56	184

CARBON STEEL 碳素钢 预硬钢	ALLOY STEEL 合金钢 CHINA TOOL STEEL 工具钢	PRE HARDENED STEEL 预硬钢	HARDENED STEEL 淬硬钢	STAINLESS STEEL 不锈钢	CAST IRON 铸铁 DUCTILE IRON 球墨铸铁 ~350HB	COPPER ALLOY 铜合金	ALUMINUM ALLOY 铝合金	TITANIUM ALLOY 钛合金	HEAT-RESISTING ALLOY 耐热合金
○		○	○	○		○	○	○	○




■ 红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029



ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR8D-003	3	34	29	Φ6	36	74
DR8D-031	3.1	34	29	Φ6	36	74
DR8D-0315	3.15	34	29	Φ6	36	74
DR8D-032	3.2	34	29	Φ6	36	74
DR8D-0325	3.25	34	29	Φ6	36	74
DR8D-033	3.3	34	29	Φ6	36	74
DR8D-034	3.4	34	29	Φ6	36	74
DR8D-035	3.5	34	29	Φ6	36	74
DR8D-036	3.6	34	29	Φ6	36	74
DR8D-037	3.7	34	29	Φ6	36	74
DR8D-038	3.8	43	36	Φ6	36	81
DR8D-0385	3.85	43	36	Φ6	36	81
DR8D-039	3.9	43	36	Φ6	36	81
DR8D-004	4	43	36	Φ6	36	81
DR8D-041	4.1	43	36	Φ6	36	81
DR8D-042	4.2	43	36	Φ6	36	81
DR8D-043	4.3	43	36	Φ6	36	81
DR8D-0435	4.35	43	36	Φ6	36	81
DR8D-044	4.4	43	36	Φ6	36	81
DR8D-0445	4.45	43	36	Φ6	36	81
DR8D-045	4.5	43	36	Φ6	36	81
DR8D-046	4.6	43	36	Φ6	36	81
DR8D-0465	4.65	43	36	Φ6	36	81
DR8D-047	4.7	43	36	Φ6	36	81
DR8D-048	4.8	57	48	Φ6	36	95
DR8D-049	4.9	57	48	Φ6	36	95
DR8D-005	5	57	48	Φ6	36	95
DR8D-051	5.1	57	48	Φ6	36	95
DR8D-052	5.2	57	48	Φ6	36	95



■ 红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR8D-0525	5.25	57	48	Φ6	36	95
DR8D-053	5.3	57	48	Φ6	36	95
DR8D-054	5.4	57	48	Φ6	36	95
DR8D-055	5.5	57	48	Φ6	36	95
DR8D-555	5.55	57	48	Φ6	36	95
DR8D-056	5.6	57	48	Φ6	36	95
DR8D-057	5.7	57	48	Φ6	36	95
DR8D-0575	5.75	57	48	Φ6	36	95
DR8D-058	5.8	57	48	Φ6	36	95
DR8D-059	5.9	57	48	Φ6	36	95
DR8D-0595	5.95	57	48	Φ6	36	95
DR8D-006	6	57	48	Φ6	36	95
DR8D-061	6.1	76	66	Φ8	36	116
DR8D-062	6.2	76	66	Φ8	36	116
DR8D-063	6.3	76	66	Φ8	36	116
DR8D-064	6.4	76	66	Φ8	36	116
DR8D-065	6.5	76	66	Φ8	36	116
DR8D-066	6.6	76	66	Φ8	36	116
DR8D-067	6.7	76	66	Φ8	36	116
DR8D-0675	6.75	76	66	Φ8	36	116
DR8D-068	6.8	76	66	Φ8	36	116
DR8D-069	6.9	76	66	Φ8	36	116
DR8D-007	7	76	66	Φ8	36	116
DR8D-071	7.1	76	66	Φ8	36	116
DR8D-072	7.2	76	66	Φ8	36	116
DR8D-073	7.3	76	66	Φ8	36	116
DR8D-074	7.4	76	66	Φ8	36	116
DR8D-0745	7.45	76	66	Φ8	36	116
DR8D-075	7.5	76	66	Φ8	36	116
DR8D-076	7.6	76	66	Φ8	36	116
DR8D-077	7.7	76	66	Φ8	36	116
DR8D-078	7.8	76	66	Φ8	36	116
DR8D-079	7.9	76	66	Φ8	36	116

外冷钻头



■ 红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

d (刃径)	T (m7公差)
3 < Φ ≤ 6	+0.004~+0.016
6 < Φ ≤ 10	+0.006~+0.021
10 < Φ ≤ 18	+0.007~+0.025
18 < Φ ≤ 20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR8D-008	8	76	66	Φ8	36	116
DR8D-081	8.1	95	83	Φ10	40	142
DR8D-082	8.2	95	83	Φ10	40	142
DR8D-083	8.3	95	83	Φ10	40	142
DR8D-084	8.4	95	83	Φ10	40	142
DR8D-085	8.5	95	83	Φ10	40	142
DR8D-086	8.6	95	83	Φ10	40	142
DR8D-087	8.7	95	83	Φ10	40	142
DR8D-875	8.75	95	83	Φ10	40	142
DR8D-088	8.8	95	83	Φ10	40	142
DR8D-089	8.9	95	83	Φ10	40	142
DR8D-009	9	95	83	Φ10	40	142
DR8D-091	9.1	95	83	Φ10	40	142
DR8D-092	9.2	95	83	Φ10	40	142
DR8D-093	9.3	95	83	Φ10	40	142
DR8D-0935	9.35	95	83	Φ10	40	142
DR8D-094	9.4	95	83	Φ10	40	142
DR8D-0945	9.45	95	83	Φ10	40	142
DR8D-095	9.5	95	83	Φ10	40	142
DR8D-096	9.6	95	83	Φ10	40	142
DR8D-097	9.7	95	83	Φ10	40	142
DR8D-098	9.8	95	83	Φ10	40	142
DR8D-099	9.9	95	83	Φ10	40	142
DR8D-100	10	95	83	Φ10	40	142
DR8D-101	10.1	114	99	Φ12	45	162
DR8D-102	10.2	114	99	Φ12	45	162
DR8D-1025	10.25	114	99	Φ12	45	162
DR8D-103	10.3	114	99	Φ12	45	162
DR8D-104	10.4	114	99	Φ12	45	162
DR8D-105	10.5	114	99	Φ12	45	162
DR8D-106	10.6	114	99	Φ12	45	162
DR8D-107	10.7	114	99	Φ12	45	162
DR8D-1075	10.75	114	99	Φ12	45	162



■ 红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font


d (刃径)	T (m7公差)
3 < Φ ≤ 6	+0.004~+0.016
6 < Φ ≤ 10	+0.006~+0.021
10 < Φ ≤ 18	+0.007~+0.025
18 < Φ ≤ 20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR8D-108	10.8	114	99	Φ12	45	162
DR8D-109	10.9	114	99	Φ12	45	162
DR8D-110	11	114	99	Φ12	45	162
DR8D-111	11.1	114	99	Φ12	45	162
DR8D-112	11.2	114	99	Φ12	45	162
DR8D-1125	11.25	114	99	Φ12	45	162
DR8D-113	11.3	114	99	Φ12	45	162
DR8D-1135	11.35	114	99	Φ12	45	162
DR8D-114	11.4	114	99	Φ12	45	162
DR8D-1145	11.45	114	99	Φ12	45	162
DR8D-115	11.5	114	99	Φ12	45	162
DR8D-116	11.6	114	99	Φ12	45	162
DR8D-117	11.7	114	99	Φ12	45	162
DR8D-118	11.8	114	99	Φ12	45	162
DR8D-119	11.9	114	99	Φ12	45	162
DR8D-120	12	114	99	Φ12	45	162
DR8D-121	12.1	133	116	Φ14	45	178
DR8D-122	12.2	133	116	Φ14	45	178
DR8D-1225	12.25	133	116	Φ14	45	178
DR8D-123	12.3	133	116	Φ14	45	178
DR8D-124	12.4	133	116	Φ14	45	178
DR8D-125	12.5	133	116	Φ14	45	178
DR8D-126	12.6	133	116	Φ14	45	178
DR8D-127	12.7	133	116	Φ14	45	178
DR8D-1275	12.75	133	116	Φ14	45	178
DR8D-128	12.8	133	116	Φ14	45	178
DR8D-129	12.9	133	116	Φ14	45	178
DR8D-130	13	133	116	Φ14	45	178
DR8D-131	13.1	133	116	Φ14	45	178
DR8D-1335	13.35	133	116	Φ14	45	178
DR8D-135	13.5	133	116	Φ14	45	178
DR8D-1365	13.65	133	116	Φ14	45	178
DR8D-138	13.8	133	116	Φ14	45	178

外冷钻头

DR- 8D
DR外冷钻头8D
DR-Solid Carbide Drill 8D

DR-8D
外冷钻头
Solid Carbide Drill



红色字体标注的有螺纹底孔
Threaded bottom hole marked
in red font

Table with 2 columns: d (刃径), T (m7公差). Rows show tolerance ranges for different diameter ranges.

Main table for DR-8D drills listing item codes, diameters (d1-m7), lengths (L1, LU, L), and shank diameters (Dh6).

GEEFUN
DR- 12D
DR外冷钻头12D
DR-Solid Carbide Drill 12D

适用于普通加工, 模具, 汽配和航空等各种材料。
Applicable to ordinary processing, mold, automobile and aviation and other materials.




Table with 2 columns: d (刃径), T (m7公差). Rows show tolerance ranges for different diameter ranges.

Main table for DR-12D drills listing item codes, diameters (d1-m7), lengths (L1, LU, L), and shank diameters (Dh6).

DR-12D
外冷钻头
Solid Carbide Drill





d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR12D-059	5.9	78	72	Φ6	36	116
DR12D-006	6	78	72	Φ6	36	116
DR12D-061	6.1	93	84	Φ8	36	131
DR12D-062	6.2	93	84	Φ8	36	131
DR12D-063	6.3	93	84	Φ8	36	131
DR12D-064	6.4	93	84	Φ8	36	131
DR12D-065	6.5	93	84	Φ8	36	131
DR12D-066	6.6	93	84	Φ8	36	131
DR12D-067	6.7	93	84	Φ8	36	131
DR12D-068	6.8	93	84	Φ8	36	131
DR12D-069	6.9	93	84	Φ8	36	131
DR12D-007	7	93	84	Φ8	36	131
DR12D-071	7.1	108	96	Φ8	36	146
DR12D-072	7.2	108	96	Φ8	36	146
DR12D-073	7.3	108	96	Φ8	36	146
DR12D-074	7.4	108	96	Φ8	36	146
DR12D-075	7.5	108	96	Φ8	36	146
DR12D-076	7.6	108	96	Φ8	36	146
DR12D-077	7.7	108	96	Φ8	36	146
DR12D-078	7.8	108	96	Φ8	36	146
DR12D-079	7.9	108	96	Φ8	36	146
DR12D-008	8	108	96	Φ8	36	146
DR12D-081	8.1	120	108	Φ10	40	162
DR12D-082	8.2	120	108	Φ10	40	162
DR12D-083	8.3	120	108	Φ10	40	162
DR12D-084	8.4	120	108	Φ10	40	162
DR12D-085	8.5	120	108	Φ10	40	162
DR12D-086	8.6	120	108	Φ10	40	162
DR12D-087	8.7	120	108	Φ10	40	162
DR12D-088	8.8	120	108	Φ10	40	162
DR12D-089	8.9	120	108	Φ10	40	162
DR12D-009	9	120	108	Φ10	40	162
DR12D-091	9.1	132	120	Φ10	40	174



d (刃径)	T (m7公差)
3<Φ≤6	+0.004~+0.016
6<Φ≤10	+0.006~+0.021
10<Φ≤18	+0.007~+0.025
18<Φ≤20	+0.008~+0.029

ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR12D-092	9.2	132	120	Φ10	40	174
DR12D-093	9.3	132	120	Φ10	40	174
DR12D-094	9.4	132	120	Φ10	40	174
DR12D-095	9.5	132	120	Φ10	40	174
DR12D-096	9.6	132	120	Φ10	40	174
DR12D-097	9.7	132	120	Φ10	40	174
DR12D-098	9.8	132	120	Φ10	40	174
DR12D-099	9.9	132	120	Φ10	40	174
DR12D-100	10	132	120	Φ10	40	174
DR12D-101	10.1	156	144	Φ12	45	204
DR12D-102	10.2	156	144	Φ12	45	204
DR12D-103	10.3	156	144	Φ12	45	204
DR12D-104	10.4	156	144	Φ12	45	204
DR12D-105	10.5	156	144	Φ12	45	204
DR12D-106	10.6	156	144	Φ12	45	204
DR12D-107	10.7	156	144	Φ12	45	204
DR12D-108	10.8	156	144	Φ12	45	204
DR12D-109	10.9	156	144	Φ12	45	204
DR12D-110	11	156	144	Φ12	45	204
DR12D-111	11.1	156	144	Φ12	45	204
DR12D-112	11.2	156	144	Φ12	45	204
DR12D-113	11.3	156	144	Φ12	45	204
DR12D-114	11.4	156	144	Φ12	45	204
DR12D-115	11.5	156	144	Φ12	45	204
DR12D-116	11.6	156	144	Φ12	45	204
DR12D-117	11.7	156	144	Φ12	45	204
DR12D-118	11.8	156	144	Φ12	45	204
DR12D-119	11.9	156	144	Φ12	45	204
DR12D-120	12	156	144	Φ12	45	204
DR12D-125	12.5	182	168	Φ14	45	230
DR12D-127	12.7	182	168	Φ14	45	230
DR12D-128	12.8	182	168	Φ14	45	230
DR12D-130	13	182	168	Φ14	45	230

DR- 12D
DR外冷钻头12D
DR-Solid Carbide Drill 12D

DR-12D
外冷钻头
Solid Carbide Drill

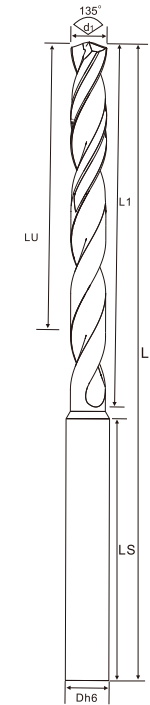


Table with 2 columns: d (刃径) and T (m7公差). Rows show ranges for d from 3 to 20 and corresponding T values.

Main table for DR-12D drill bits with columns: ITEM CODE, d1-m7, L1, LU, Dh6, LS, L. Rows list various models from DR12D-135 to DR12D-200.

GEEFUN®
DR- 15D
DR外冷钻头15D
DR-Solid Carbide Drill 12D

DR-15D
外冷钻头
Solid Carbide Drill

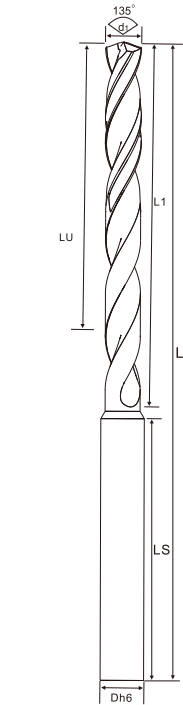


Table with 2 columns: d (刃径) and T (m7公差). Rows show ranges for d from 3 to 20 and corresponding T values.

Main table for DR-15D drill bits with columns: ITEM CODE, d1-m7, L1, LU, Dh6, LS, L. Rows list various models from DR15D-003 to DR15D-059.


DR- 15D
DR外冷钻头15D
DR-Solid Carbide Drill 15D

DR-15D
外冷钻头
Solid Carbide Drill


DR- 15D
DR标准钻头15D
DR-Solid Carbide Drill 15D

DR-15D
标准钻头
Carbide Twist Drill

外冷钻头

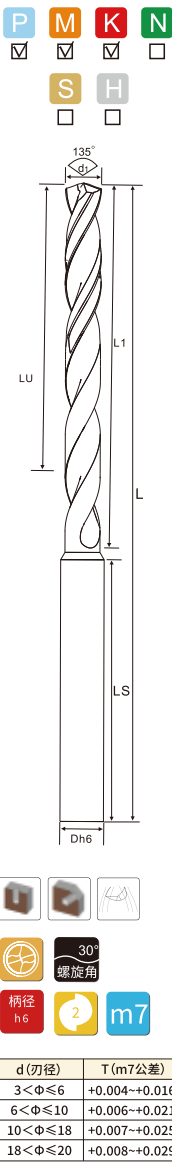


ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR15D-006	6	127	109	Φ6	36	167
DR15D-061	6.1	127	109	Φ8	36	167
DR15D-062	6.2	127	109	Φ8	36	167
DR15D-063	6.3	127	109	Φ8	36	167
DR15D-064	6.4	127	109	Φ8	36	167
DR15D-065	6.5	127	109	Φ8	36	167
DR15D-066	6.6	127	109	Φ8	36	167
DR15D-067	6.7	127	109	Φ8	36	167
DR15D-068	6.8	127	109	Φ8	36	167
DR15D-069	6.9	127	109	Φ8	36	167
DR15D-007	7	143	122	Φ8	36	183
DR15D-071	7.1	143	122	Φ8	36	183
DR15D-072	7.2	143	122	Φ8	36	183
DR15D-073	7.3	143	122	Φ8	36	183
DR15D-074	7.4	143	122	Φ8	36	183
DR15D-075	7.5	143	122	Φ8	36	183
DR15D-076	7.6	143	122	Φ8	36	183
DR15D-077	7.7	143	122	Φ8	36	183
DR15D-078	7.8	143	122	Φ8	36	183
DR15D-079	7.9	143	122	Φ8	36	183
DR15D-008	8	160	142	Φ8	36	204
DR15D-081	8.1	160	142	Φ10	40	204
DR15D-082	8.2	160	142	Φ10	40	204
DR15D-083	8.3	160	142	Φ10	40	204
DR15D-084	8.4	160	142	Φ10	40	204
DR15D-085	8.5	160	142	Φ10	40	204
DR15D-086	8.6	160	142	Φ10	40	204
DR15D-087	8.7	160	142	Φ10	40	204
DR15D-088	8.8	160	142	Φ10	40	204
DR15D-089	8.9	160	142	Φ10	40	204
DR15D-009	9	177	150	Φ10	40	221
DR15D-091	9.1	177	150	Φ10	40	221
DR15D-092	9.2	177	150	Φ10	40	221

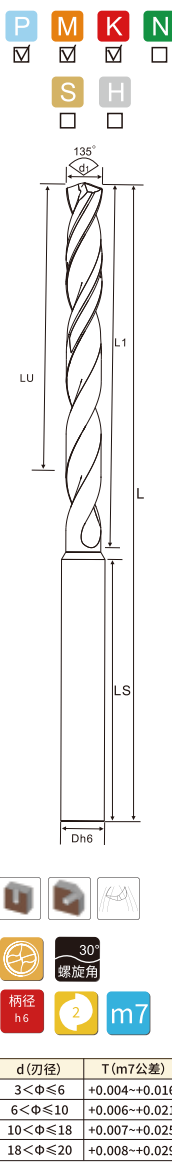


ITEM CODE	d1-m7	L1	LU	Dh6	LS	L
DR15D-093	9.3	177	150	Φ10	40	221
DR15D-094	9.4	177	150	Φ10	40	221
DR15D-095	9.5	177	150	Φ10	40	221
DR15D-096	9.6	177	150	Φ10	40	221
DR15D-097	9.7	177	150	Φ10	40	221
DR15D-098	9.8	177	150	Φ10	40	221
DR15D-099	9.9	177	150	Φ10	40	221
DR15D-100	10	198	168	Φ10	40	247
DR15D-101	10.1	198	168	Φ12	45	247
DR15D-102	10.2	198	168	Φ12	45	247
DR15D-103	10.3	198	168	Φ12	45	247
DR15D-104	10.4	198	168	Φ12	45	247
DR15D-105	10.5	198	168	Φ12	45	247
DR15D-106	10.6	198	168	Φ12	45	247
DR15D-107	10.7	198	168	Φ12	45	247
DR15D-108	10.8	198	168	Φ12	45	247
DR15D-109	10.9	198	168	Φ12	45	247
DR15D-110	11	198	168	Φ12	45	247
DR15D-111	11.1	214	178	Φ12	45	263
DR15D-112	11.2	214	178	Φ12	45	263
DR15D-113	11.3	214	178	Φ12	45	263
DR15D-114	11.4	214	178	Φ12	45	263
DR15D-115	11.5	214	178	Φ12	45	263
DR15D-116	11.6	214	178	Φ12	45	263
DR15D-117	11.7	214	178	Φ12	45	263
DR15D-118	11.8	214	178	Φ12	45	263
DR15D-119	11.9	214	178	Φ12	45	263
DR15D-120	12	214	178	Φ12	45	263
DR15D-125	12.5	248	206	Φ14	45	297
DR15D-127	12.7	248	206	Φ14	45	297
DR15D-128	12.8	248	206	Φ14	45	297
DR15D-130	13	248	206	Φ14	45	297
DR15D-135	13.5	248	206	Φ14	45	297
DR15D-140	14	248	206	Φ14	45	297

外冷钻头



ITEM CODE	d1-h7	L1	LU	Dh6	LS	L
DR20D-003	3	70	62	Φ6	36	110
DR20D-031	3.1	83	72	Φ6	36	123
DR20D-032	3.2	83	72	Φ6	36	123
DR20D-033	3.3	83	72	Φ6	36	123
DR20D-034	3.4	83	72	Φ6	36	123
DR20D-035	3.5	83	72	Φ6	36	123
DR20D-036	3.6	96	84	Φ6	36	136
DR20D-037	3.7	96	84	Φ6	36	136
DR20D-038	3.8	96	84	Φ6	36	136
DR20D-039	3.9	96	84	Φ6	36	136
DR20D-004	4	96	84	Φ6	36	136
DR20D-041	4.1	108	96	Φ6	36	148
DR20D-042	4.2	108	96	Φ6	36	148
DR20D-043	4.3	108	96	Φ6	36	148
DR20D-044	4.4	108	96	Φ6	36	148
DR20D-045	4.5	108	96	Φ6	36	148
DR20D-046	4.6	118	106	Φ6	36	158
DR20D-047	4.7	118	106	Φ6	36	158
DR20D-048	4.8	118	106	Φ6	36	158
DR20D-049	4.9	118	106	Φ6	36	158
DR20D-005	5	118	106	Φ6	36	158
DR20D-051	5.1	128	116	Φ6	36	168
DR20D-052	5.2	128	116	Φ6	36	168
DR20D-053	5.3	128	116	Φ6	36	168
DR20D-054	5.4	128	116	Φ6	36	168
DR20D-055	5.5	128	116	Φ6	36	168
DR20D-056	5.6	140	126	Φ6	36	180
DR20D-057	5.7	140	126	Φ6	36	180
DR20D-058	5.8	140	126	Φ6	36	180
DR20D-059	5.9	140	126	Φ6	36	180



ITEM CODE	d1-h7	L1	LU	Dh6	LS	L
DR20D-006	6	140	126	Φ6	36	180
DR20D-061	6.1	150	132	Φ8	36	192
DR20D-062	6.2	150	132	Φ8	36	192
DR20D-063	6.3	150	132	Φ8	36	192
DR20D-064	6.4	150	132	Φ8	36	192
DR20D-065	6.5	150	132	Φ8	36	192
DR20D-066	6.6	162	144	Φ8	36	202
DR20D-067	6.7	162	144	Φ8	36	202
DR20D-068	6.8	162	144	Φ8	36	202
DR20D-069	6.9	162	144	Φ8	36	202
DR20D-007	7	162	144	Φ8	36	202
DR20D-071	7.1	173	155	Φ8	36	213
DR20D-072	7.2	173	155	Φ8	36	213
DR20D-073	7.3	173	155	Φ8	36	213
DR20D-074	7.4	173	155	Φ8	36	213
DR20D-075	7.5	173	155	Φ8	36	213
DR20D-076	7.6	183	165	Φ8	36	223
DR20D-077	7.7	183	165	Φ8	36	223
DR20D-078	7.8	183	165	Φ8	36	223
DR20D-079	7.9	183	165	Φ8	36	223
DR20D-008	8	183	165	Φ8	36	223
DR20D-081	8.1	195	176	Φ10	40	239
DR20D-082	8.2	195	176	Φ10	40	239
DR20D-083	8.3	195	176	Φ10	40	239
DR20D-084	8.4	195	176	Φ10	40	239
DR20D-085	8.5	195	176	Φ10	40	239
DR20D-086	8.6	205	186	Φ10	40	249
DR20D-087	8.7	205	186	Φ10	40	249
DR20D-088	8.8	205	186	Φ10	40	249
DR20D-089	8.9	205	186	Φ10	40	249
DR20D-009	9	205	186	Φ10	40	249
DR20D-091	9.1	218	196	Φ10	40	262
DR20D-092	9.2	218	196	Φ10	40	262
DR20D-093	9.3	218	196	Φ10	40	262


DR-20D
DR外冷钻头20D
DR-Solid Carbide Drill 20D

DR-20D
外冷钻头
Solid Carbide Drill


DR-25D
DR外冷钻头25D
DR-Solid Carbide Drill 25D

DR-25D
外冷钻头
Solid Carbide Drill

外冷钻头

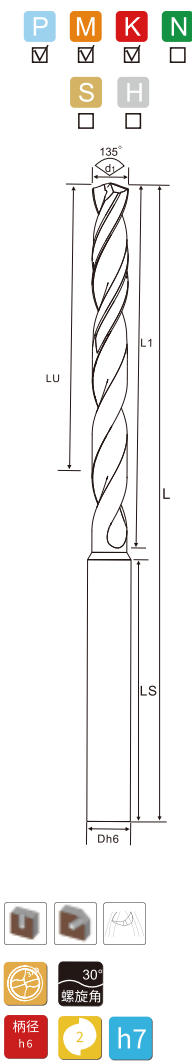

ITEM CODE	d1-h7	L1	LU	Dh6	LS	L
DR20D-094	9.4	218	196	Φ10	40	262
DR20D-095	9.5	218	196	Φ10	40	262
DR20D-096	9.6	228	206	Φ10	40	272
DR20D-097	9.7	228	206	Φ10	40	272
DR20D-098	9.8	228	206	Φ10	40	272
DR20D-099	9.9	228	206	Φ10	40	272
DR20D-100	10	228	206	Φ10	40	272
DR20D-101	10.1	242	220	Φ12	45	292
DR20D-102	10.2	242	220	Φ12	45	292
DR20D-103	10.3	242	220	Φ12	45	292
DR20D-104	10.4	242	220	Φ12	45	292
DR20D-105	10.5	242	220	Φ12	45	292
DR20D-106	10.6	250	228	Φ12	45	300
DR20D-107	10.7	250	228	Φ12	45	300
DR20D-108	10.8	250	228	Φ12	45	300
DR20D-109	10.9	250	228	Φ12	45	300
DR20D-110	11	250	228	Φ12	45	300
DR20D-111	11.1	265	240	Φ12	45	315
DR20D-112	11.2	265	240	Φ12	45	315
DR20D-113	11.3	265	240	Φ12	45	315
DR20D-114	11.4	265	240	Φ12	45	315
DR20D-115	11.5	265	240	Φ12	45	315
DR20D-116	11.6	275	250	Φ12	45	325
DR20D-117	11.7	275	250	Φ12	45	325
DR20D-118	11.8	275	250	Φ12	45	325
DR20D-119	11.9	275	250	Φ12	45	325
DR20D-120	12	275	250	Φ12	45	325
DR20D-125	12.5	275	250	Φ12	45	325

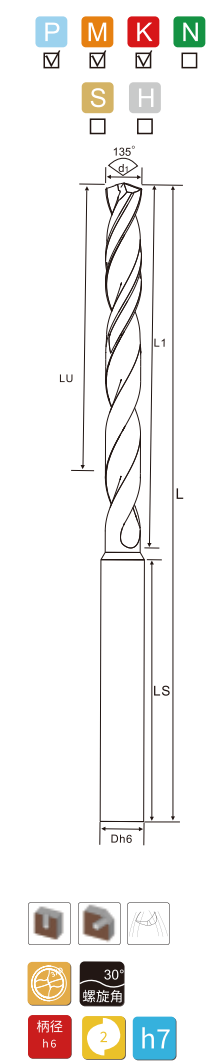

ITEM CODE	d1-h7	L1	LU	Dh6	LS	L
DR25D-003	3	85	74	Φ6	36	125
DR25D-031	3.1	116	105	Φ6	36	156
DR25D-032	3.2	116	105	Φ6	36	156
DR25D-033	3.3	116	105	Φ6	36	156
DR25D-034	3.4	116	105	Φ6	36	156
DR25D-035	3.5	116	105	Φ6	36	156
DR25D-036	3.6	116	105	Φ6	36	156
DR25D-037	3.7	116	105	Φ6	36	156
DR25D-038	3.8	116	105	Φ6	36	156
DR25D-039	3.9	116	105	Φ6	36	156
DR25D-004	4	116	105	Φ6	36	156
DR25D-041	4.1	143	131	Φ6	36	183
DR25D-042	4.2	143	131	Φ6	36	183
DR25D-043	4.3	143	131	Φ6	36	183
DR25D-044	4.4	143	131	Φ6	36	183
DR25D-045	4.5	143	131	Φ6	36	183
DR25D-046	4.6	143	131	Φ6	36	183
DR25D-047	4.7	143	131	Φ6	36	183
DR25D-048	4.8	143	131	Φ6	36	183
DR25D-049	4.9	143	131	Φ6	36	183
DR25D-005	5	143	131	Φ6	36	183
DR25D-051	5.1	170	152	Φ6	36	210
DR25D-052	5.2	170	152	Φ6	36	210
DR25D-053	5.3	170	152	Φ6	36	210
DR25D-054	5.4	170	152	Φ6	36	210
DR25D-055	5.5	170	152	Φ6	36	210
DR25D-056	5.6	170	152	Φ6	36	210
DR25D-057	5.7	170	152	Φ6	36	210
DR25D-058	5.8	170	152	Φ6	36	210

外冷钻头

外冷钻头



Table with 7 columns: ITEM CODE, d1-h7, L1, LU, Dh6, LS, L. Rows include items DR25D-059 to DR25D-091.

外冷钻头



Table with 7 columns: ITEM CODE, d1-h7, L1, LU, Dh6, LS, L. Rows include items DR25D-092 to DR25D-100 and several empty rows.

GEEFUN®

DR-30D

DR外冷钻头30D

DR-Solid Carbide Drill 30D

适用于普通加工，模具，汽配和航空等各种材料。

Applicable to ordinary processing , mold, automobile and aviation and other materials.

P M K N
☑ ☑ ☑ ☐

S H
☐ ☐



DR-30D

外冷钻头

Solid Carbide Drill



DR-30D

DR外冷钻头30D

DR-Solid Carbide Drill 30D

DR-30D

外冷钻头

Solid Carbide Drill

P M K N
☑ ☑ ☑ ☐

S H
☐ ☐



ITEM CODE	d1-h7	L1	LU	Dh6	LS	L
DR30D-059	5.9	200	182	Φ8	36	240
DR30D-006	6	200	182	Φ8	36	240
DR30D-061	6.1	220	202	Φ8	36	260
DR30D-062	6.2	220	202	Φ8	36	260
DR30D-063	6.3	220	202	Φ8	36	260
DR30D-064	6.4	220	202	Φ8	36	260
DR30D-065	6.5	220	202	Φ8	36	260
DR30D-066	6.6	232	214	Φ8	36	272
DR30D-067	6.7	232	214	Φ8	36	272
DR30D-068	6.8	232	214	Φ8	36	272
DR30D-069	6.9	232	214	Φ8	36	272
DR30D-007	7	232	214	Φ8	36	272
DR30D-071	7.1	250	232	Φ8	36	290
DR30D-072	7.2	250	232	Φ8	36	290
DR30D-073	7.3	250	232	Φ8	36	290
DR30D-074	7.4	250	232	Φ8	36	290
DR30D-075	7.5	250	232	Φ8	36	290
DR30D-076	7.6	265	246	Φ8	36	305
DR30D-077	7.7	265	246	Φ8	36	305
DR30D-078	7.8	265	246	Φ8	36	305
DR30D-079	7.9	265	246	Φ8	36	305
DR30D-008	8	265	246	Φ8	36	305
DR30D-081	8.1	285	265	Φ10	40	330
DR30D-082	8.2	285	265	Φ10	40	330
DR30D-083	8.3	285	265	Φ10	40	330
DR30D-084	8.4	285	265	Φ10	40	330
DR30D-085	8.5	285	265	Φ10	40	330